


Group C Requirements (NO TANDEM):

- Helmet: SA2015, SA2010, SA2005
- No loose items: interior, trunk
- Fire extinguisher: securely mounted, 2lb. min
- Fluid leaks: No fluid leaks
- Catch cans: Coolant. Oil if non OEM
- Gas cap: Present and sealed
- Fuel line: Check hose clamps and fittings
- Battery: Securely mounted, terminals covered
- Brake light: Minimum 2 functioning
- Brake pedal: Good feel, maintain pressure
- Key/master cutoff operation (location marked)
- Lug nuts: Present and secure
- Steering: Smooth, no binding
- Tow hooks: Front and rear (OEM at own risk)
- Hood and trunk: Securely latched
- Windshield: OEM or Lexan securely mounted
- Seat: OEM with stock belts or FIA with harness
- Convertibles: Must have OEM rollbar (minimum)

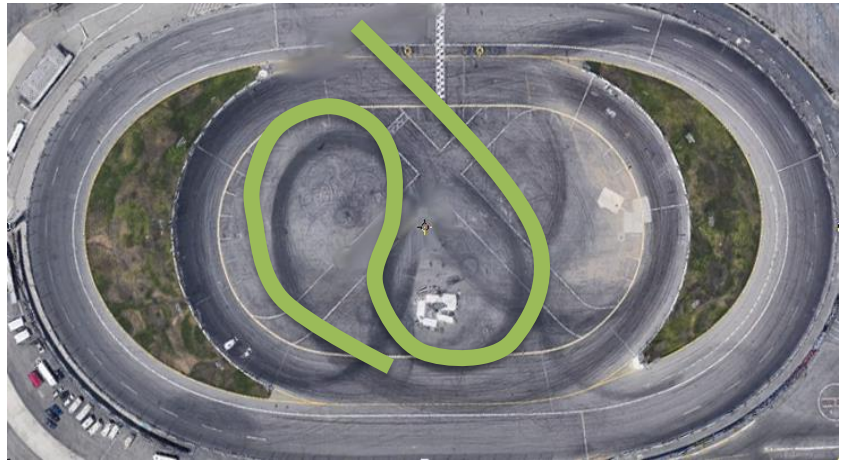

Group B Requirements (NO TANDEM):

- Group C requirements
- Suspension: Coilovers or non OEM suspension
- Differential: Welded or clutch type
- E-Brake: Functioning, cable or hydro
- Convertibles: must have a rollbar



Group A Requirements (TANDEM CLASS):

- Group C and Group B requirements
- 6 point roll cage: 1.5"x0.095 DOM
- Door bars: Nascar or X on both doors
- Harness bar and diagonal bar
- Seat Belts: 5 point minimum required
- Fire Suit: SFI 3-2A/5 with fire resistant gloves and shoes

TANDEM CLASS ELIGIBLE CARS CAN RUN ON COURSE-A OR COURSE-B

